



Apollo OT9408

Next Generation Compact Modular Optical Transport



Apollo OT9408 is the industry's highest capacity and highest density platform for 100GbE, 400GbE, and future 800GbE transport. It is designed to provide network operators with the lowest cost per bit for long haul and high traffic density metro applications.

Apollo OT9408 achieves this by exploiting next generation Jannu 5nm 140Gbaud transceiver technology that leapfrogs the performance of current generation 7nm 95Gbaud based solutions. It distinctively features a combination of continuous baud rate and continuous modulation controls that maximize the line rate, from 400G to 1200G, for any distance and channel width right to the edge of the Shannon Limit. This enables Apollo OT9408 to meet the most demanding needs of network operators by uniquely providing 1200G wavelengths for short haul applications, 800G wavelengths that cover the entire extended-metro space with ease, and 400G wavelengths for ultra-long haul.

Apollo OT9408 also delivers ultra-dense 400G metro networking solutions using pay-as-you-grow QSFP-DD 0dBm+ pluggables, which are OpenROADM compliant for disaggregated transmission applications.



Not only does Apollo OT9408 deliver outstanding performance, it incorporates many features to facilitate deployment and operability. It is packaged in a compact 2RU chassis with front to back cooling for data center residency. MPO fibers enable installation simplicity, and all common modules are field replaceable. Auto discovery and gNMI telemetry support advanced operations. Apollo OT9408 can be deployed in a disaggregated fashion with control via an industry standard APIs, or in conjunction with other Ribbon networking platforms with control via Muse SDN Orchestrator.

Programmable
line rates up
to 1200G

Industry highest-density
up to 19.2T
in 2RU

Disaggregated
operation over
third-party OLS

Intelligent
for advanced
operations

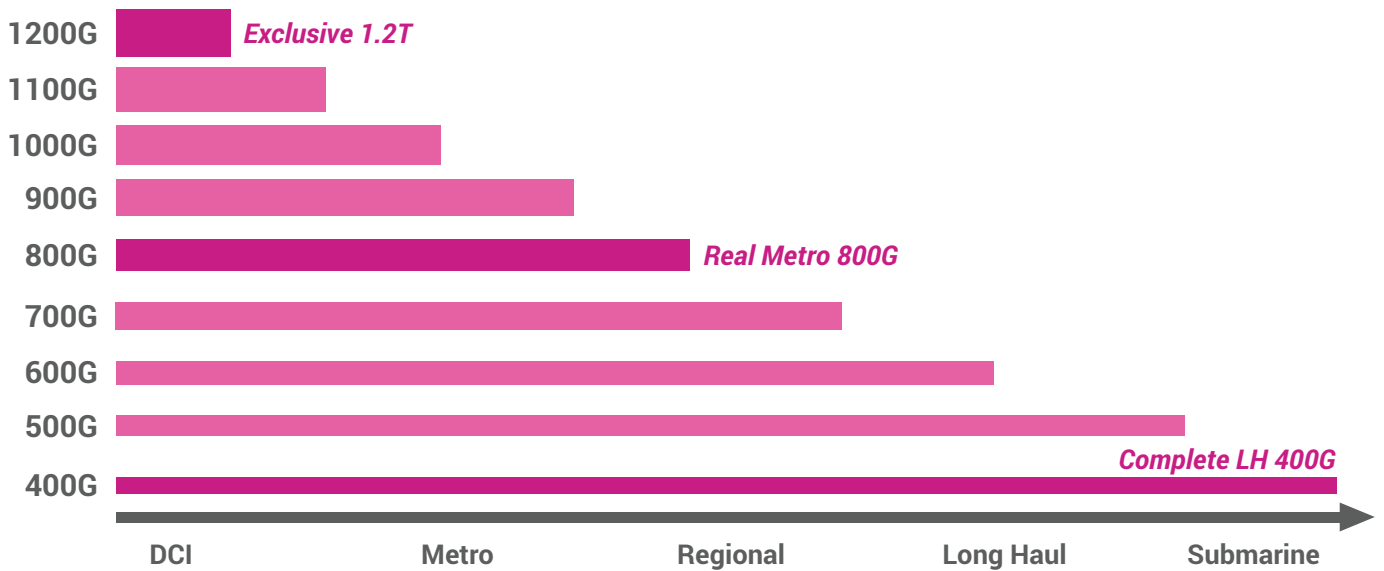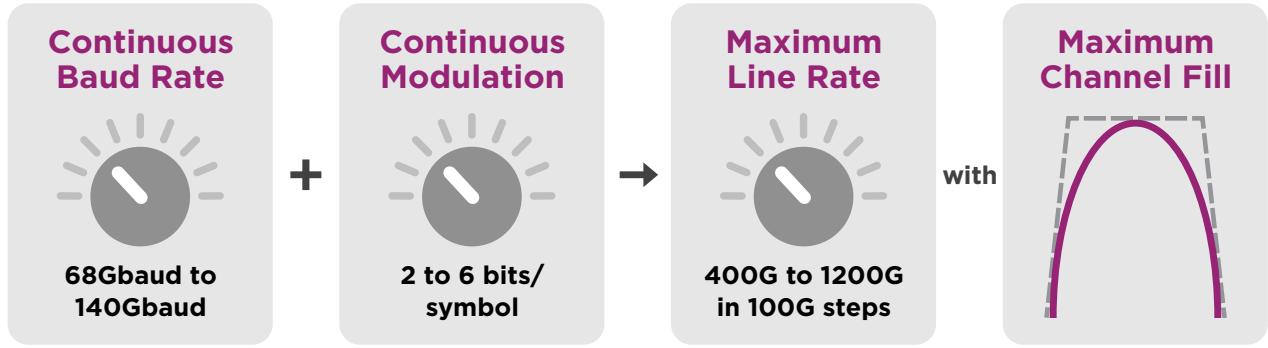

Representative Apollo OT9408 line performance with 5nm-140Gbaud powered transceiver

By combining next generation 5nm 140Gbaud transceiver technology with continuous baud rate and continuous modulation controls, Apollo OT9408 maximizes the line rate, from 400G to 1200G, for any distance and channel width right to the edge of the Shannon Limit.

Technical Specifications

| | |
|---|--|
| Spectrum | C-band, L-band; Flexible grid with 12.5GHz granularity, fixed grid 50GHz/100GHz |
| Capacity | 8 single slot or 4 double slot blades, mixing allowed |
| MPJ1200_2 flexible growth high performance blade | <ul style="list-style-type: none"> • Double slot • Two independently pluggable Jannu-powered CIM8 transceivers • Line rate to 400-1200G per transceiver at 140Gbaud • Two QSFP-DD clients each supporting 1x400GbE or 4x100GbE; gray or ZR+ • Two QSFP-DD800 each supporting 2x400GbE or 8x100GbE; gray or ZR+ • Hardware ready for 800GbE |
| MIC1200_2 high density high performance blade | <ul style="list-style-type: none"> • Single slot • Two independent integrated Jannu-powered transceivers • Line rate to 400-1200G per transceiver at 140Gbaud • Two QSFP-DD clients each supporting 1x400GbE or 4x100GbE; gray or ZR+ • Two QSFP-DD800 each supporting 2x400GbE or 8x100GbE; gray or ZR+ • Hardware ready for 800GbE |
| MPQ_8 high density flexible growth 400G blade | <ul style="list-style-type: none"> • Double slot • Eight independent lines using QSFP-DD-DCO 0dBm+ pluggable transceivers • 100G to 400G per line • OpenROADM compliant • 8 x QSFP-DD clients each supporting 1x400GbE or 4x100GbE; gray or ZR+ |
| Encryption | Optional L1 optical encryption on all line interfaces |
| Physical and Temperature | <ul style="list-style-type: none"> • 600x440x88.4 mm • Front to back airflow • 0°C - 45°C • All common modules field replaceable |
| Power | <p>Max 3200W 90VAC-240VAC redundant PSU</p> <p>Max 3300W 40.5VDC-72VDC redundant PSU</p> |
| Operations | <ul style="list-style-type: none"> • SNMP, ZTP, CLI • Auto discovery • gNMI telemetry • Integrated performance monitoring |
| Security | <ul style="list-style-type: none"> • Syslog, Syslog-ng • RADIUS, TACACS+, Kerberos • TLS 1.3, SSH, SNMPv3 |
| Controller | 6 ports (1 console, 4 RJ45, 1 USB-C) |
| Management | <ul style="list-style-type: none"> • Muse SDN Orchestrator • OpenConfig and OpenROADM APIs |

Contact Us

Contact us to find out how Ribbon can build powerful and flexible optical networks