



Neptune NPT-1050

High Capacity Metro Access Transport for Packet and TDM

Neptune (NPT) is a family of carrier-class MPLS-based multiservice packet-optical transport platforms, offering best-in-class Carrier Ethernet and packet transport solutions for the metro. Neptune streamlines end-to-end metro service delivery by combining carrier-grade service assurance, visibility, and control, with packet efficiency and unparalleled L1 to L3 multiservice support. Neptune offers converged support for Ethernet, MPLS, TDM, OTN, and WDM to provide a powerful, flexible solution for high-performance services and Elastic MPLS. SDN and NFV capabilities allow Neptune to evolve to meet the rapidly changing metro environment.




NPT-1050 is a compact, fully-redundant, modular, multiservice packet transport platform, which is 1RU in height and supports Ethernet, TDM and MPLS-TP with up to 100Gbps in packet switching and a 15Gbps TDM matrix. Support for native TDM and TDM over CES/CEP make NPT-1050 ideal for operators looking for a modern metro access packet platform on which to evolve their legacy TDM network. With such a rich and robust feature set, NPT-1050 is well-suited for a wide variety of applications and networking scenarios. These include; CES for TDM migration, mobile backhaul, wholesale services, residential multiplay, business VPNs, and mission-critical service delivery. Like all Ribbon's transport products, NPT-1050 is managed by Ribbon's Muse™ software suite.

Elastic Multiservice

Carrier-Grade Service Assurance

Fully-Managed Across TDM and Packet

Elastic Scalability

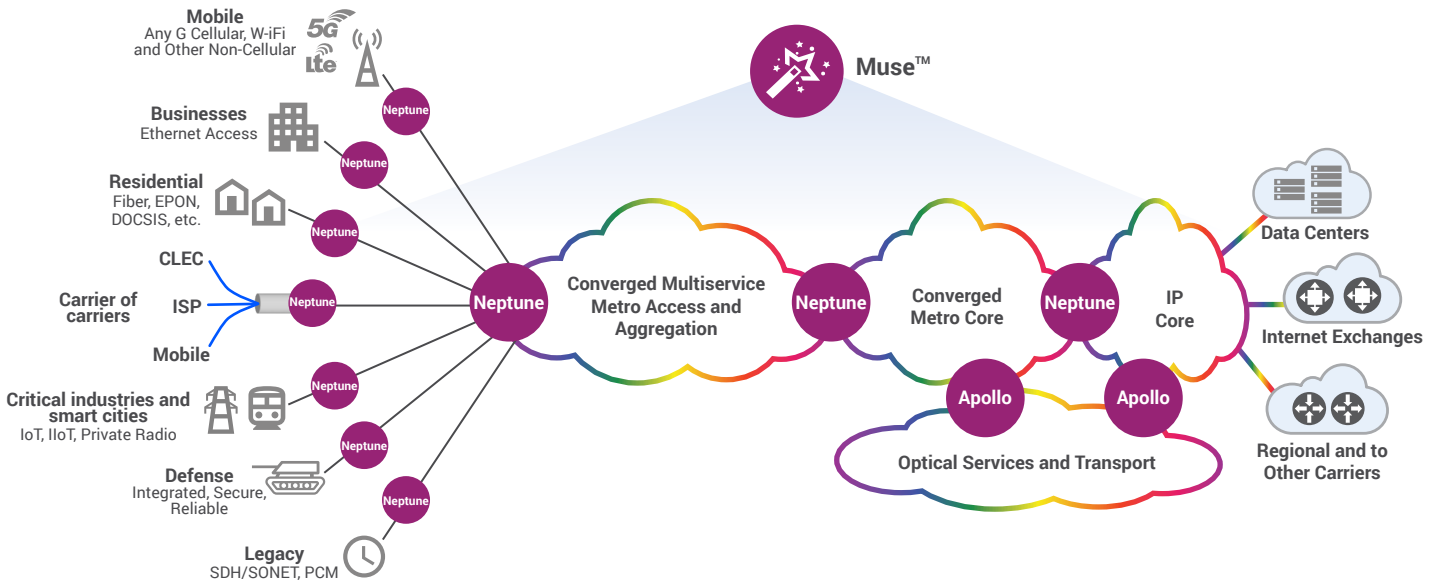

Technical Specifications

Packet	Switch: 100 Gbps Services: MEF CE2.0 (E-Line, E-LAN, E-Tree, E-Access) PN and VPN based Ethernet and IP, MPLS -TP Max. Interfaces: 20 x 10/100/1000 Base-T, 40 x 100/1000 Base-X, 10 x 10GE
TDM	Matrix: 15 Gbps with 4/3/1 connectivity (100% LO granularity) Services: Native TDM, CES (SAToP, CESoPSN and CEP) Max. native Interfaces: 5 x STM-16, 14 x STM-4, 14 x STM-1, 9 x DS3/E3, 189 x E1 Max. CES interfaces: 96 x E1/T1, 12 x STM-1/OC-3, 3 x STM-4/OC-12
WDM	CWDM, DWDM, muxponder, amplifiers
Timing and Synchronization	SyncE with ESMC, 1588v2, external timing 1PPS and TOD, internal stratum 3 clock (holdover state), primary and secondary sources (supports SSM bits), ACR, DCR, loop timing on SAToP, TDM bits (T3/T4), and SNTP
Protection and restoration	Hardware redundancy for common units, IO hardware Protection (IOP), RSTP/MSTP, G.8032 Ethernet Ring Protection (ERP), MPLS-TP FRR, Dual FRR, 1:1 Linear protection, PW Redundancy (PWR), Multisegment-PW, IEEE 802.3ad Ethernet Link Aggregation (LAG) with LACP, Multi-Chassis LAG (MC-LAG)
OAM	Ethernet OAM (IEEE802.3ah, IEEE 802.1ag and ITU-T Y.1731 PM), MPLS-TP OAM (G8113.2)(CC/AIS/RDI/LB/LT/DM), Bidirectional Forwarding Detection (BFD), RFC 2544 generator, Y.1564 Ethernet service activation (SLA)
Traffic management	Traffic classification (based on port, VLAN, Port+VLAN, IEEE 802.1p, DSCP), Diffserv based TM, network-wide Call Admission Control (CAC), 8 Classes of Service (CoS)
Topologies	Mesh, dual homing, multiring, ring, star, linear
Security	RADIUS (client authentication), SSH 2, SW integrity verification (SHA-2), SFTP, Access Control List (ACL), IEEE802.1x, control channel HMAC-256, Public key authentication, Port blocked as default
Management	MUSE software suite, MUSE LightSOFT® NMS, EMS-NPT, SNMPv2/v3, LCT, Muse™
Power over Ethernet (PoE+)	Up to 30W
Pluggable SFP/CSFP/SFP+ support	Electrical, colored C/DWDM, tunable, noncolored, Compact SFP (CSFP), SFP+, and bidirectional SFPs/SFP+
Power input	-40 VDC to -72 VDC, 220V
Power dissipation	Typical: 150W
Operating temperature range	-25°C to +70°C (-13°F to 158°F)
Operating RH range	5% to 95%
Environmental standards	ETS 300 019-1-3 Class 3.3, ETS 300 019-2-3 Class 3.3, EN55022 Radiation Emissions (class A), IEEE 1613 (electric utility substations), IEC 61850-3 (electric utility substations), EN 61000-6-5 (immunity for substations)
Safety	EN60950-1
EMS	EN 300 386
Physical dimensions	H x W x D: 1.7" x 18.3" x 10.4" / 44 x 465 x 263 mm

Expansion Unit

OTN	Services: Ethernet, storage, video, SDH/SONET Max. service interfaces: 48 x 1GE, STM-1/4/OC-3/12/FC-1, 24 x STM-16/OC-48/FC-2, 12 x FC-4, 3 x 10GbE/FC-8/FC-12/STM-64/OC-192, 30/24/12 x SDI/HD-SDI/HD-SDI3G Max. transport interfaces: 24 x OTU-1, 3 x OTU-2/e
Packet	Max. service Interfaces: 36 x 10/100base-T, 36 x 100 base-X 12x100/1000 Base-X, 24 x 10/100/1000 Base-T
TDM	Max. service interfaces: • Native: 189 x E1, 9 x E3/DS3, 12 x STM-1 • CES: 96 x E1 • Native or CES: 72 x (n x 64Kbps, FXO, FXS, 2/4W E&M, V24 (RS232), V35, V36, V11, RS422, RS449, C37.94, OMNI, CODIR, G.703 64K over TDM or packet)
Physical dimensions	H x W x D: 3.5" x 17.4" x 9.6" / 88 x 443 x 243 mm

Specifications subject to change without notice

[Contact Us](#)

We are here to help. Contact us about our IP Wave solutions.