

# NPT 1015

## Compact Packet CPE




The NPT 1015 is an extremely compact, fully-managed, packet CPE, supporting Ethernet, TDM, and MPLS-TP in a small, fan less form factor.



Its 1RU height and 8Gbit/s capacity make it a perfect fit for customer premise demarcation points and the Ethernet interfaces efficiently utilize the access infrastructure.

With such a rich and robust feature set and its fan less operation the NPT 1015 is well-suited for a wide variety of applications and networking scenarios, these include;

- CES for TDM migration
- Mobile backhaul
- Wholesale services
- Residential multiplay
- Business VPNs,
- Mission-critical networks

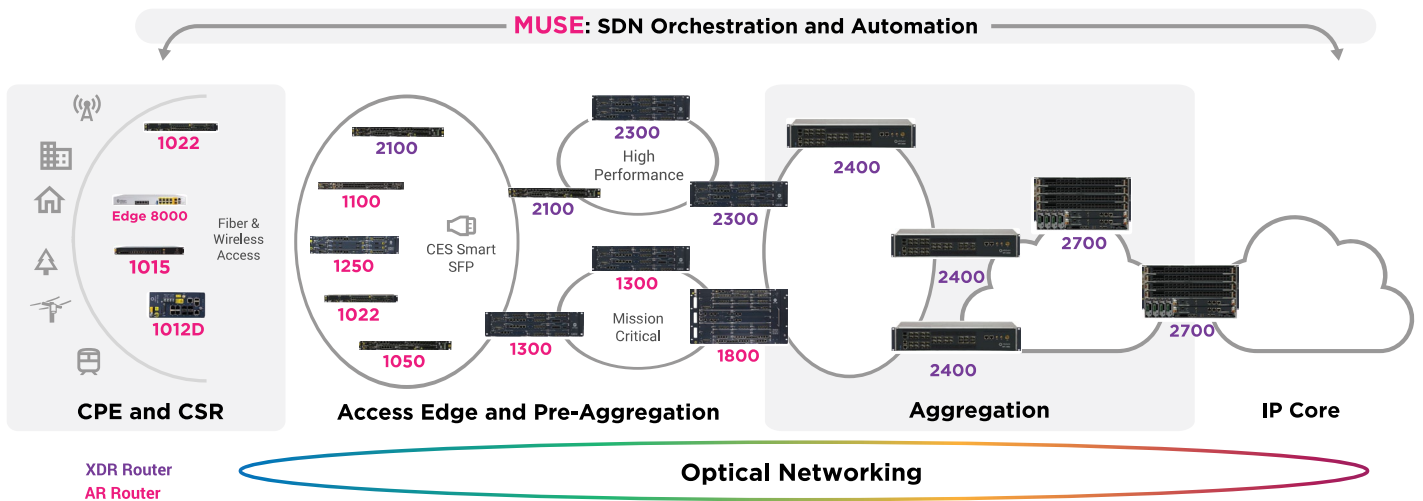

Full NPT Portfolio

## Key Product Specifications NPT 1015B

### Platform

Description	Specification
Performance	<ul style="list-style-type: none"> <li>8 Gbps Switch</li> </ul>
Traffic Interfaces	<ul style="list-style-type: none"> <li>Max. Interfaces</li> <li>4 x 10/100/1000 BaseT with 4 x 100/1000 BaseT/X</li> </ul>
Cooling	<ul style="list-style-type: none"> <li>Fan less cooling</li> </ul>
Timing	<ul style="list-style-type: none"> <li>SyncE with ESMC</li> <li>1588v2</li> <li>Internal stratum 3 clock (holdover state)</li> <li>Primary and secondary sources (supports SSM bits)</li> <li>ACR, DCR</li> <li>Loop timing on SAToP</li> <li>SNTP</li> </ul>
Physical Specification	<ul style="list-style-type: none"> <li>H x W x D: 44.5 x 440 x 169 mm</li> <li>Weight:               <ul style="list-style-type: none"> <li>1.70kg with DC power</li> <li>2.12kg with AC power)</li> </ul> </li> </ul>

### Environmental

Description	Specification
Operating environment and altitude	<ul style="list-style-type: none"> <li>-5°C to +50°C (-13°F to 149°F)</li> </ul>
Operating humidity	<ul style="list-style-type: none"> <li>5% to 95%</li> </ul>
Power input	<ul style="list-style-type: none"> <li>DC-48V ±20% or AC 100~240V</li> </ul>
Power dissipation	<ul style="list-style-type: none"> <li>Typical: DC 25W, AC 27W</li> </ul>

## Standards Compliance

Description	Specification
<b>Regulatory</b>	<ul style="list-style-type: none"> <li>• Products should comply with CE markings according to directives 2014/30/EC and 2014/35/EC</li> </ul>
<b>Safety</b>	<ul style="list-style-type: none"> <li>• EN 62368-1:2020 + A11:2020</li> <li>• IEC 62368-1:2018</li> </ul>
<b>EMC</b>	<ul style="list-style-type: none"> <li>• ETSI EN 300 386 V1.6.1:2012</li> <li>• ETSI EN 300386 V2.1.1:2016</li> <li>• EN 55035:2017/A11:2020</li> <li>• EN 55032:2015/A11:2020</li> <li>• CISPR 32:2015</li> </ul>
<b>Environmental standards</b>	<ul style="list-style-type: none"> <li>• ETS 300 019-2-1 Class 3.3</li> <li>• ETS 300 019-2-2 Class 3.3</li> <li>• ETS 300 019-2-3 Class 3.3</li> <li>• QM 333</li> </ul>
<b>RoHS</b>	<ul style="list-style-type: none"> <li>• Compliance per EU RoHS, RoHS 2 directive 2011/65/EU and amendment 2015/863/EU directives</li> </ul>

## Multi-access Edge and Transport Capabilities

Description	Specification
Packet Services	<ul style="list-style-type: none"><li>• MPLS-TP</li><li>• VPN based Ethernet</li><li>• L2VPN - MEF 3.0<ul style="list-style-type: none"><li>• E-Line</li><li>• E-LAN</li><li>• E-Tree</li><li>• E-Access</li></ul></li></ul>
TDM Services	<ul style="list-style-type: none"><li>• CES (SAToP)</li></ul>
TDM Interfaces	<ul style="list-style-type: none"><li>• Max. Interfaces: 4 x E1</li></ul>
IP Over DWDM	<ul style="list-style-type: none"><li>• CWDM</li><li>• DWDM</li></ul>
Pluggable SFP support	<ul style="list-style-type: none"><li>• Electrical</li><li>• Colored C/DWDM</li><li>• Non-colored bidirectional SFPs</li></ul>

## Software Features Provided by NPT 1015B

Description	Specification
<b>OAM</b>	<ul style="list-style-type: none"> <li>Ethernet OAM (IEEE802.3ah, IEEE 802.1ag and ITU-T Y.1731 PM)</li> <li>MPLS-TP OAM (G8113.2) (CC/AIS/RDI/LB/LT/DM)</li> <li>Bidirectional Forwarding Detection (BFD)</li> </ul>
<b>Traffic management (QoS)</b>	<ul style="list-style-type: none"> <li>Traffic classification (based on Port, VLAN, Port+VLAN IEEE 802.1p and DSCP)</li> <li>Diffserv based TM</li> <li>Network Connection Admission Control (CAC)</li> <li>8 Classes of Service (CoS)</li> </ul>
<b>Supported Topologies</b>	<ul style="list-style-type: none"> <li>Mesh</li> <li>Dual homing</li> <li>Multi-ring</li> <li>Ring</li> <li>Star</li> <li>Linear</li> </ul>
<b>Security</b>	<ul style="list-style-type: none"> <li>Secure Shell SSHv2 and SFTP are supported to access the NE</li> <li>Access Control List (ACL) is supported</li> <li>OSPF key authentication is supported</li> </ul>
<b>Manageability</b>	<ul style="list-style-type: none"> <li>LightSOFT® NMS</li> <li>EMS-NPT</li> <li>SNMPv2/v3</li> <li>LightAPPS</li> <li>LCT</li> <li>CLI</li> </ul>

*Specifications subject to change without notice*

**Contact Us** Contact us to learn more about Ribbon solutions.

### About Ribbon

Ribbon Communications (Nasdaq: RBBN) delivers communications software, IP and optical networking solutions to service providers, enterprises and critical infrastructure sectors globally. We engage deeply with our customers, helping them modernize their networks for improved competitive positioning and business outcomes in today's smart, always-on and data-hungry world. Our innovative, end-to-end solutions portfolio delivers unparalleled scale, performance, and agility, including core to edge software-centric solutions, cloud-native offers, leading-edge security and analytics tools, along with IP and optical networking solutions for 5G. We maintain a keen focus on our commitments to Environmental, Social and Governance (ESG) matters, offering an annual Sustainability Report to our stakeholders. To learn more about Ribbon, please visit [rbbn.com](https://rbbn.com).