



SBC SWe Lite – Virtualized Software

Intelligent Edge™ – Enterprise Session Border Control Software



Organizations are rapidly adopting cloud communications whether it be Unified Communications as a Service (UCaaS), Microsoft Teams or SIP Trunks to connect premises PBX equipment. Ribbon's Session Border Controller Software Edition Lite (SBC SWe Lite), is virtualized software that provides market leading security for real-time communications.

The SBC SWe Lite has an extremely compact footprint that makes it easy to deploy and configure in almost any environment, be it a white box server at the edge, a shared server in a data center or as a virtual machine in a private cloud. The solution can also be deployed in Azure or AWS, see our Public Cloud datasheet for more details.

The SBC SWe Lite protects communications infrastructure from Denial of Service (DoS)/ Distributed DOS (DDoS) attacks, maintains privacy, encrypts calls, and interworks with a wide variety of third-party SIP and legacy voice infrastructure devices/services, all while providing reliable, scalable performance that ensures maximum uptime and service availability. SBC SWe Lite is deployable on Microsoft® Hyper-V®, VMware® vSphere® Hypervisor and Linux® KVM.

Ribbon has been working closely with Microsoft for more than a decade so it should come as no surprise that the SBC SWe Lite is Microsoft certified for Microsoft Direct Routing.

The SBC SWe Lite is also certified with Zoom™, Cisco BroadSoft™, Yealink®, Poly® and tested with other popular services and products.



Microsoft Certified for Direct Routing



Certified for Zoom Phone

Key Capabilities

- Secure signaling, media, and management
- Robust media processing including SILK & OPUS
- Denial-of-Service (DoS) and Distributed DoS (DDoS) attack prevention
- Easy Configuration Wizard
- Centralized management via EdgeView Service Control Center
- Support for redundant SIP trunks
- Microsoft Phone System emergency calling support (E911, ELIN)
- 30-day trial license with permanent option available
- Perpetual and monthly licensing options

Capabilities	SBC SWe Lite
Maximum Concurrent Calls	300 to 1200
Maximum Calls with Media Services (including SILK & OPUS high-fidelity voice)	95 to 1200
Maximum Encrypted Calls	300 to 1200
Call Recording Support (SIPREC)	✓
Permanent License Option	✓
Monthly Licensing Option	✓
Microsoft Direct Routing Certified	✓
Session Resiliency	✓

Note: Ribbon's SBC SWe Lite can also be deployed on virtual machines and in public cloud environments (Azure and AWS). Ribbon's SBC 1000 and SBC 2000 appliances are also available, sharing the same software.

▶ [Click Here to Get a Quote for One of Our SBCs](https://www.rbbn.com/ribbon-sbc-quote)
<https://www.rbbn.com/ribbon-sbc-quote>



Part of an Industry Leading Portfolio of Real-time Security Solutions - from Ribbon Communications

The SBC SWe Lite virtualized deployment represents one element of Ribbon's security portfolio. SBC SWe Lite can also be deployed in the AWS or Azure clouds. Ribbon's SBC 1000 and SBC 2000 share the same software as the SBC SWe Lite, offering an appliance-based alternative for organizations that desire a hardware-based deployment or that need analog or TDM ports for integration.



Ribbon also provides massively scalable SBCs for large enterprises and over 1,000 of the world's leading communications service providers. In fact, there is a good chance that your communications service provider is already a Ribbon customer.



Built-in Tools for Rapid Deployment




Ribbon has made it easy for enterprise or managed service providers to deploy an SBC SWe Lite instance. The SBC SWe Lite includes a built-in Easy Configuration Wizard that is prepopulated with sought-after PBXs, cloud UC services, and service provider configurations, making deployments as simple as point and click. It's also easy to test the solution prior to purchase, a 30-day trial license is enabled by default. Most importantly, the SBC SWe Lite has been successfully deployed tens of thousands of times to secure communications for organizations of all sizes, across the globe.

Centrally Managed from EdgeView Service Control Center

Ribbon SBC SWe Lite is centrally managed via the EdgeView Service Control Center. The EdgeView provides streamlined access to SBC SWe Lite management interfaces and simplified access to cross location centralized reporting. The EdgeView platform manages heterogenous deployments of EdgeMarc elements, SBC 1000 & SBC 2000 appliances and SBC SWe Lite instances in data centers or public cloud. Customers can rationalize far-flung networks, monitor performance and quickly remediate issues to improve experiences and reduce costs.

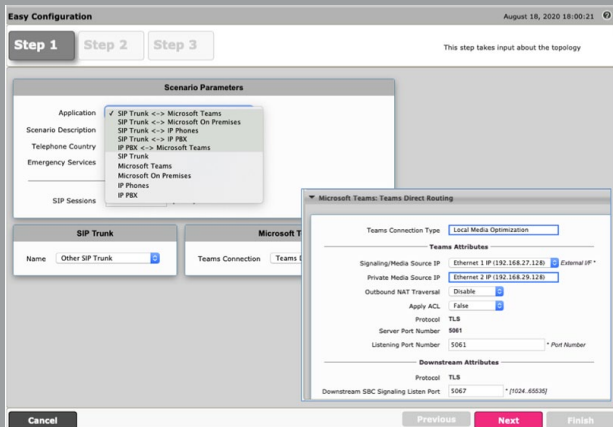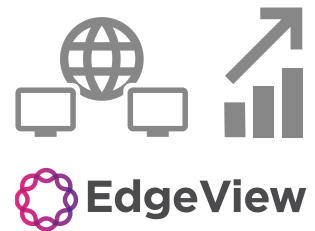

Easy to use configuration wizard

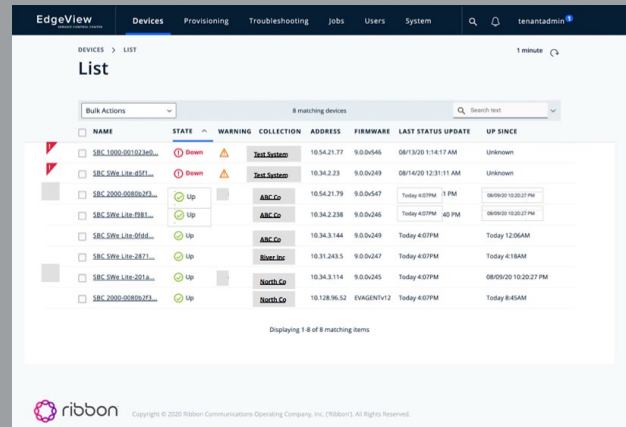

Easily spot issues across thousands of instances



PSTN Access



VoIP Firewall



NAT/DHCP




WAN Resiliency



Back-up Call Server



Call Recording Support



Voice Quality Monitor



Traffic Shaper

The Ribbon SBC SWe Lite is fully virtualized software that provides a comprehensive solution to secure and manage communications

SBC SWe Lite – Virtualized Software

Features and Capabilities	Specifications
Security	<ul style="list-style-type: none"> • TLS (Transaction Layer Security) for signaling encryption - TLS 1.2 (RFC 5246) • Secure Real-time Transport Protocol (SRTP) & Control Protocol (SRTCP) for media and media control encryption (RFC 3711) • Multiple unique X.509 public key certificates/PKCS #12 files (up to 11) • Wildcard certificate support • Topology hiding; user privacy • Prevention of Denial-of-Service (DoS) and Distributed DoS (DDoS) attacks • Traffic separation (VLAN interface separation) • Malformed packet protection • Access Control Lists (ACLs) • IPsec VPN tunnel • NAT/NAPT and port forwarding; NAT traversal
Protocol Support	<ul style="list-style-type: none"> • SIP (RFC 3261) over UDP, TCP, TLS • RTP/RTCP/RTCP-XR (RFC 3550, 3551, 3611) • RTP/RTCP multiplexing over single UDP port (RFC 5761) • IPv4, IPv6, and IPv4/IPv6 interworking • DHCP server & client (RFC 2131) • Network Address Translation – NAT (RFC 2663) • SNMPv2c, SNMPv3 • HTTPS • RIPv2, OSPF as dynamic IP routing protocols • TDM Signaling (ISDN): AT&T 4ESS/5ESS, Nortel DMS-100, Euro ISDN (ETSI 300-102), QSIG, NTT InsNet (Japan), ANSI National ISDN-2 (NI-2) • TDM Signaling (CAS): T1 CAS (E&M, Loop start); E1 CAS (R2)
Media Services	<ul style="list-style-type: none"> • G.711, G.722, G.722.2 (AMR-WB), G.723.1, G.726 (32 kbps), G.729A/B (8 kbps), T.38, SILK-NB/WB media encoding • Video interworking • Session Recording Protocol support - SIPREC (RFC 7866) • DTMF support: RFC 4733, inband DTMF, SIP INFO (RFC 2833) • Voice Activity Detection (VAD) • G.168 Echo cancellation with standard 128 ms tail length • Comfort noise generation and packet loss concealment • Music on hold • RTP inactivity monitoring (inactive call detection)
Quality of Service (QoS)	<ul style="list-style-type: none"> • Bandwidth management • Call Admission Control (CAC) to deny inappropriate calls • P-time mediation for rate limiting • Per-call statistics • Diffserv/DSCP marking
Routing/Policy	<ul style="list-style-type: none"> • Interactive Connectivity Establishment (ICE), full and lite support (RFC 8445) • Azure® and on-premises Active Directory®/LDAP-based call routing • Least cost, time of day and quality-based routing • On-board call forking (up to eight end points) • Supplementary services: call hold, call transfer (blind & assisted) and call forward • SIP routing based on source and destination IP address or Fully Qualified Domain Name (FQDN) • One number fax support (single DID for voice and fax) • ITSP E911 support; 911 call preemption
Management Capabilities	<ul style="list-style-type: none"> • Single, secure, web-based GUI with real-time port monitoring • Easy Configuration Wizard, for quick provisioning between <ul style="list-style-type: none"> - SIP trunks, SIP phones, SIP PBXs (e.g. Avaya® Aura® or Cisco® Unified Communications Manager) - Microsoft Direct Routing • Centralized management from EdgeView Service Control Center • REST-based programmatic interface to remotely manage multiple SBCs • SNMP v2c/v3 for comprehensive network management using third-party management systems • Configuration backup and restore; upload from one site to another • CDR reporting and local logging for troubleshooting • Free Ribbon LX syslog server and log parser tool available • Authentication: local user (username/password), Active Directory®, RADIUS
Certified SBC for Microsoft Phone System & Direct Routing (Teams)	<ul style="list-style-type: none"> • SILK-NB, SILK-WB codec support for improved Microsoft Teams user experience • Enhanced 911 (E911) and Emergency Location Identification Number (ELIN) Gateway Support • Media Bypass and Local Media Optimization support • Simplified migration from on-premises Skype for Business Server to Microsoft Teams • Support for multiple tenant-related Direct Routing deployments with Microsoft partners/PSTN carriers

SBC SWe Lite – Virtualized Software

Features and Capabilities	Specifications
Site Survivability	<ul style="list-style-type: none"> • IP route redundancy to UC provider, in case of ISP or router failure • PSTN fallback in case of WAN failure • Built-in SIP registrar for site survivability for SIP clients including Yealink® Teams and Poly® UC phones and conference bridges • Multiple Spanning Tree Protocol, to prevent routing loops
Virtual Machine System Requirements	<ul style="list-style-type: none"> • CPU 1, 2, 4, or 10 virtual CPUs (vCPU) processing recommended on a second-generation Intel® Core™ or Intel® Xeon® processor • Memory: 1, 1.5, or 2.5 GB RAM • Hard Disk Drive (HDD): 5 GB • Virtual Network Interface Cards (vNIC): <ul style="list-style-type: none"> - Minimum 2 vNICs in operation - Supported Virtual Machine Environments: Microsoft Hyper-V®, VMware® vSphere® Hypervisor (ESXi) Version 5.5 or above - Linux® KVM (Kernel-based Virtual Machine)
SBC System Capacities	<p>Virtual Machine Configurations</p> <p>1 vCPU, 1.5 GB RAM Virtual Machine Configuration</p> <ul style="list-style-type: none"> - Maximum SIP ↔ SIP sessions: 300 - Encryption: <ul style="list-style-type: none"> - Maximum TLS-encrypted SIP sessions: 300 - Maximum RTP ↔ SRTP sessions: 300 - Maximum transcode sessions (G.711 ↔ G.729/SILK): 95 - Maximum call setup rate: 10 cps - Maximum registered users: 1,000 <p>2 vCPU, 2 GB RAM Virtual Machine Configuration</p> <ul style="list-style-type: none"> - Maximum SIP ↔ SIP sessions: 1,000 - Encryption: <ul style="list-style-type: none"> - Maximum TLS-encrypted SIP sessions: 1,000 - Maximum RTP ↔ SRTP sessions: 1,000 - Maximum transcode sessions (G.711 ↔ G.729/SILK): 200 - Maximum call setup rate: 10 cps - Maximum registered users: 1,000 <p>4 vCPU, 3 GB RAM Virtual Machine Configuration</p> <ul style="list-style-type: none"> - Maximum SIP ↔ SIP sessions: 1,000 - Encryption: <ul style="list-style-type: none"> - Maximum TLS-encrypted SIP sessions: 1,000 - Maximum transcode sessions (G.711 ↔ G.729/SILK): 450 (600 if all SIP ↔ SIP sessions are configured to run through the DSP) - Maximum call setup rate: 10 cps - Maximum registered users: 5,000 <p>10 vCPU, 4GB RAM Virtual Machine Configuration</p> <ul style="list-style-type: none"> - Maximum SIP ↔ SIP sessions: 1,200 - Encryption: <ul style="list-style-type: none"> - Maximum TLS-encrypted SIP sessions: 1,200 - Maximum RTP ↔ SRTP sessions: 1,200 - Maximum transcode sessions (G.711 ↔ G.729/SILK): 1,200 - Maximum call setup rate: 10 cps - Maximum registered users: 5,000

▶ [Click Here to Get a Quote for One of Our SBCs](https://www.rbn.com/ribbon-sbc-quote) ■ <https://www.rbn.com/ribbon-sbc-quote>